

### Provera prijema satelitskog signala

1. Krunica je na poziciji 0
  2. Pritisnite dugme A
- Prikaz  
OK: prijem uspešan  
NO: prijem neuspešan

### Prijem satelitskog signala

Prijem informacije o lokaciji

1. Krunica je na poziciji 0
  2. Pritisnite i držite dugme B sve dok se kazaljka za sekunde ne postavi na poziciju RX-GPS (oko 4 sekunde)
- nakon prijema signala kazaljka za sekunde signalizira rezultat prijema i vraća se u normalnu funkciju

### Prijem signala vremena

1. Krunica je na poziciji 0
  2. Pritisnite i držite dugme A sve dok se kazaljka za sekunde ne postavi na poziciju RX-TME (oko 2 sekunde)
- nakon prijema signala kazaljka za sekunde signalizira rezultat prijema i vraća se u normalnu funkciju

### Prijem signala prestupne sekunde

1. Krunica je na poziciji 0
2. Pritisnite i držite dugme A sve oko 7 sekundi nakon prijema signala kazaljka za sekunde signalizira rezultat prijema i vraća se u normalnu funkciju

### Promena prikaza letnjeg/zimskog računanja vremena

1. Izvucite kronicu na poziciju 1
2. Pritisnite dugme A  
**SMT ON** - prikazano je letnje računanje vremena  
**SMT OFF** - prikazano je zimsko računanje vremena

3. Vratite kronicu na početnu poziciju

### Svetsko vreme


1. Izvucite kronicu na poziciju 1
2. Okrenite kronicu i odaberite vremensku zonu (40 vremenskih zona)
3. Nakon odabira vratite kronicu na početnu poziciju

Zona	Kazaljka za sekunde	Ime zone	Prikazana zona	Zona	Kazaljka za sekunde	Ime zone	Prikazana zona
0	0 sec.	<b>LON</b>	London	+11.5	28 sec.	—	Norfolk Island
+1	2 sec.	<b>PAR</b>	Paris	+12	29 sec.	<b>AKL</b>	Auckland
+2	4 sec.	<b>ATH</b>	Athens	+12.75	31 sec.	—	Chatham Islands
+3	6 sec.	<b>RUH</b>	Riyadh	+13	32 sec.	<b>TBU</b>	Nuku'alofa
+3.5	7 sec.	—	Tehran	+14	34 sec.	—	Kiritimati
+4	8 sec.	<b>DXB</b>	Dubai	-12	36 sec.	—	Baker Island
+4.5	9 sec.	—	Kabul	-11	38 sec.	<b>MDY</b>	Midway
+5	10 sec.	<b>KHI</b>	Karachi	-10	40 sec.	<b>HNL</b>	Honolulu
+5.5	12 sec.	<b>DEL</b>	Delhi	-9.5	41 sec.	—	Marquesas Islands
+5.75	13 sec.	—	Kathmandu	-9	42 sec.	<b>ANC</b>	Anchorage
+6	14 sec.	<b>DAC</b>	Dhaka	-8	44 sec.	<b>LAX</b>	Los Angeles
+6.5	15 sec.	—	Yangon	-7	46 sec.	<b>DEN</b>	Denver
+7	16 sec.	<b>BKK</b>	Bangkok	-6	48 sec.	<b>CHI</b>	Chicago
+8	18 sec.	<b>BJS (HKG)</b>	Beijing/ Hong Kong	-5	50 sec.	<b>NYC</b>	New York
+8.75	20 sec.	—	Eucla	-4.5	51 sec.	—	Caracas
+9	21 sec.	<b>TYO</b>	Tokyo	-4	52 sec.	<b>SCL</b>	Santiago
+9.5	23 sec.	<b>ADL</b>	Adelaide	-3.5	53 sec.	—	St. John's
+10	25 sec.	<b>SYD</b>	Sydney	-3	54 sec.	<b>RIO</b>	Rio de Janeiro
+10.5	26 sec.	—	Lord Howe Island	-2	56 sec.	<b>FEN</b>	Fernando de Noronha
+11	27 sec.	<b>NOU</b>	Noumea	-1	58 sec.	<b>PDL</b>	Azores

### Ručno podešavanje vremena i kalendara

1. Izvucite krunicu na poziciju 1
2. Pritisnite dugme B sve dok se kazaljka za sekunde ne zaustavi na poziciji 30
3. Izvucite krunicu na poziciju 2  
kazaljka za sekunde se zaustavlja na poziciji 0
4. Pritiskanjem dugmeta A vršite odabir segmenta za podešavanje:  
kazaljka za minute - kazaljka za sate - datum - godina/mesec - dan - povratak na početak
5. Korekciju odabranog segmenta vršite okretanjem krunice

Prikaz meseci i godina kalendara

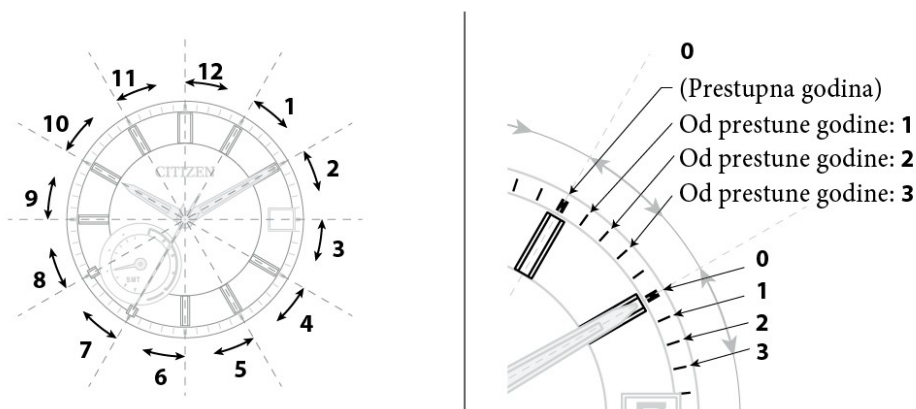

6. Nakon podešavanja vratite krunicu na početnu poziciju kako biste završili proceduru


### Provera dopunjenosti mehanizma

1. Krunica je na poziciji 0
2. Pritisnite dugme B

kazaljka za sekunde se postavlja na trenutnu poziciju dopunjenosti


Nivo	4	3	2	1	0
Indikacija					
Trajanje (approx.)	24 - 19 meseci	19 - 14 meseci	14 - 5 meseci	5 eseci - 5 dana	5 dana ili kraće
Značenje	Nivo napunjenosti je adekvatan	Nivo napunjenosti je uredu		Nivo napunjenosti se smanjuje	Nivo napunjenosti je nedovoljan
	OK za normalnu upotrebu			<b>Potrebno je dopuniti.</b>	

**Indikacija generisanja snage**

Nivo	6	5	4	3	2	1	0
Indikacija							
Začnenje	Dovoljno generisanje za dopunjavanje		Dopunjavati gde je izvor svetlosti jači "5" ili "6".				

**Provera referentne pozicije kazaljki**

- Izvučite krunicu na poziciju 1
  - Pritisnite dugme A oko 4 sekunde
- Kazaljke se postavljaju na trenutnu referentnu poziciju  
 \* sve kazaljke na 12 sati  
 \* indikacija datuma: između 31 i 1

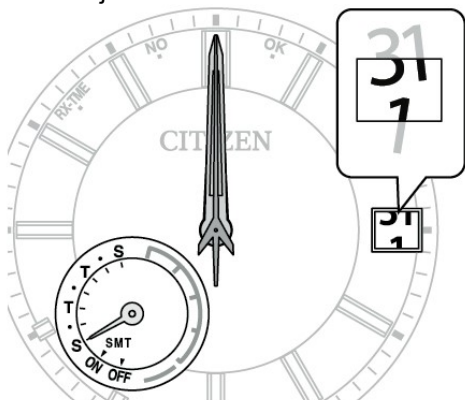


- Ukoliko je referentna pozicija adekvatna vratite krunicu na početnu poziciju i pritisnite dugme A

**Korekcija referentne pozicije**

Korekcija referentne pozicije se vrši ukoliko kazaljke nisu postavljene kao na fotografiji

- Izvučite krunicu na poziciju 2
- Pritisnite dugme A oko 4 sekunde
- Ponovnim pritiskanjem dugmeta A birate željeni segment za podešavanje  
 Datum/Dan - kazaljka za sate - kazaljka za minute - kazaljka za sekunde - povratak na početak
- Podešavanje odabranog segmenta se vrši okretanjem krunice.
- Svaki segment bi trebalo da bude na poziciji:  
 \* sve kazaljke na 12 sati  
 \* indikacija datuma: između 31 i 1

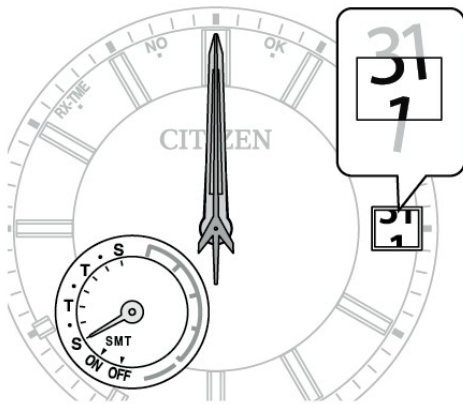

3. Nakon podešavanja vratite krunicu na početnu poziciju
4. Pritisnite Dugme A kako bi potvrdili podešavanja

### Resetovanje sata

1. izvucite krunicu na poziciju 2
  2. Simultano pritisnite dugme A i B duže od 3 sekunde
- napomena: nakon resetovanja sata potrebno je uraditi podešavanje referentne pozicije